


iTouch Surface Wave

The Ultimate Touch Technology for CRTs

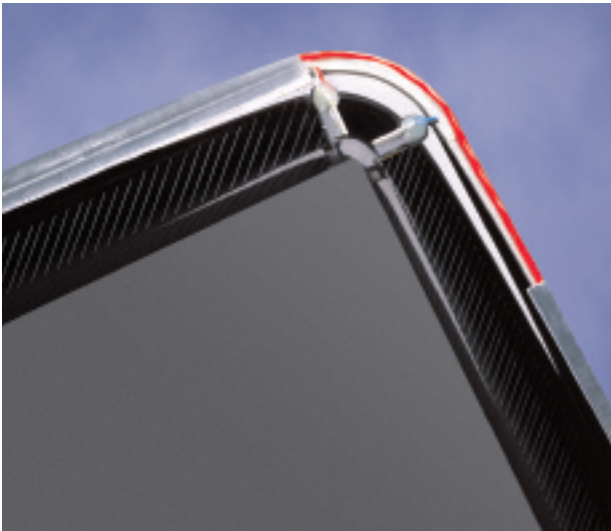

Applications

- Kiosks
- Gaming and amusement
- Digital photo print stations
- Medical imaging
- Light industrial

iTouch touchmonitors, utilizing patented touch-on-tube surface wave technology, are the ultimate, picture-perfect touch solution for applications that demand high image quality. Touches are sensed through surface waves on the CRT faceplate itself. By completely eliminating the touch-screen overlay, Elo preserves 100% of the original picture quality, including clarity, colors, and brightness, and reflections are reduced by up to 80% compared with a traditional touchscreen overlay. With its super-sensitive, stable, drift-free operation and no parallax, Elo's iTouch touchmonitors guarantee a touch response that is on target. CRT touchmonitors with iTouch are available from Elo in desktop and open or closed frame chassis configuration from 15" to 21".

Benefits

- No overlay - touch the tube directly!
- Preserves 100% of the original image quality
- Up to 20% brighter and 80% less reflection
- No overlay to break
- Continues to work even if scratched

iTouch Surface Wave

MECHANICAL

| | |
|-----------------|--|
| Input Method | Finger or gloved hand (cloth, leather, or rubber) activation |
| Available Sizes | 15" to 21"; visit our Web site for full specifications and other offerings |

ELECTRICAL

| | |
|------------------------|--|
| Positional Accuracy | Standard deviation of error is less than 0.080 in. (2 mm) |
| Resolution | Touchpoint density is based on controller resolution of 4096 x 4096, plus 255 levels corresponding to touch pressure |
| Touch Activation Force | Typically 2 to 3 ounces (55 to 85 grams) |
| Controller | Board: Serial (RS232) or USB 1.1 |

OPTICAL

| | |
|--------------------|------|
| Light Transmission | 100% |
|--------------------|------|

ENVIRONMENTAL

| | |
|--------------------------|---|
| Temperature | Operating: -20°C to 50°C Storage: -40°C to 71°C |
| Relative Humidity | Operating: 40°C at 90% RH, noncondensing |
| Altitude | Operating: 10,000 ft (3,048 m) Storage/transport: 50,000 ft (15,240 m) |
| Chemical Resistance | The touch active area of the touchmonitor is resistant to chemicals that do not affect glass, such as: acetone, toluene, methyl ethyl ketone, isopropyl alcohol, methyl alcohol, ethyl acetate, ammonia-based glass cleaners, gasoline, kerosene, vinegar |
| Electrostatic Protection | Per EN 61000-4-2, 1995: Meets Level 4 (15 kV air/8 kV contact discharges) |
| Agency Approvals | UL, cUL, TÜV, CE, FCC Class A |
| Sealability | Can be sealed to meet NEMA 3/3R/5/12/12K/13, IP64 standards; Elo kiosk and gaming iTouch monitors include a watertight seal. |
| Surface Durability | Surface durability is that of glass, Mohs' hardness rating of 7 |
| Expected Life | No known wear-out mechanism, as there are no layers, coatings, or moving parts. iTouch technology has been operationally tested to more than 50 million touches in one location without failure, using a stylus similar to a finger. |
| Warranty | See monitor warranty |



*Touch the itouch tube directly—
no touchscreen overlay needed*

Türkiye Distribütörü:

Noya Bilgisayar Sistemleri Ltd.Şti.
Şair Sabri Sok. No:7/4 Mecidiyeköy
İstanbul 34387 Turkey
Tel: (0212) 211 9192
Fax: (0212) 211 7976
E-mail: info@noyabilgisayar.com
Web: www.noyabilgisayar.com

Find out more about Elo's extensive range of touch solutions. Go to www.elotouch.com, or simply call the office nearest you.

Corporate Headquarters

Elo TouchSystems
301 Constitution Drive
Menlo Park, CA 94025-1110

800-ELO-TOUCH

Tel 1-650-361-4700
Fax 1-650-361-4747
eloinfo@elotouch.com

Europe Headquarters

Tel +32 (0)16 35 21 00
Fax +32 (0)16 35 21 01
elosales@elotouch.com

Asia-Pacific Headquarters

Tel +81 (45) 478-2161
Fax +81 (45) 478-2180
www.tps.co.jp

Latin America Headquarters

Tel 1-305-428-5210
Fax 1-305-717-4909
www.elotouch.com.ar

Elo TouchSystems reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products.

Elo TouchSystems and iTouch are trademarks of Tyco Electronics Corporation. All other trademarks are the property of their respective owners.
Copyright 2006 Tyco Electronics Corporation ELO-562 3/06